


## NWAV™ V-Pol Transparent Wide Band OMNI | SISO Antenna

### SISO 360° Ultra thin transparent wide band OMNI antenna, 1 port 617-5925 MHz

- Unique transparent material allows the antenna to blend in with surroundings
- · SISO iDAS and Small Cell ceiling mount antenna
- Wide band OMNI performance covering 617-6000 MHz
- · PIM certified





Electrical specification													
Frequency bands, MHz	617- 649	650- 697	698- 806	824- 894	894- 960	1695- 1890	1890- 1910	1910- 2200	2200- 2500	2500- 2690	3300- 3549	3550- 4200	5150- 5925
Polarization, degrees	Horizontal												
Impedance, ohms	50												
Horizontal beamwidth	Omni (360°)												
Gain, dBi, typ- ical	3.0				3.8			4.3		4.0		4.6	
VSWR / return loss, dB, max	1.6:1/ -12.7	1.4:1/ -15.6	1.4:1/ -15.6	1.4:1/ -15.6	1.55:1/ -13.3	1.8:1/	1.65:1/ -12.2	1.8:1/	1.8:1/ -10.8	1.7:1/	1.4:1/ -15.6	1.4:1/ -15.6	1.75:1/ -11.3
PIM @ 2x40 dBm	-153					-153					N/A		
Maximum input power port, W	20												

Mechanical specifications					
Dimensions height/width/depth, in. (mm)	8.25/ 5.0/ 0.062 (209.6/ 127/ 1.58)				
No. of RF input ports, connector type	1 x 4.3-10 female				
Connector torque	44.25 lbf·in (5 N·m or 3.7 lbf·ft)				
Antenna weight, lb (kg), net	0.25 (0.113)				
Mounting	Ceiling or surface mount				
Application	Indoor / Outdoor (IP65)				
Operating temperature	-40 °F to +140 °F (-40 °C to +60 °C)				
Pigtails	12" Plenum rated				

Order information					
MODEL	DESCRIPTION				
IV01OMI136-T4	Transparent wide band SISO OMNI with 4.3-10.0 pigtails				



# IV010MI136-T4


### NWAV™ V-Pol Transparent Wide Band OMNI | SISO Antenna

### **Typical MIMO Configurations**





Example 2: Side-by-side V-H Pol, Recommended orientation for enhanced MIMO performance with horizontal separation of 0.8" or greater for optimal isolation

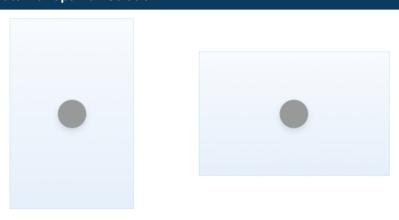

Example 3: Side-by-side Slant Pol, Recommended orientation for enhanced MIMO performance with horizontal separation of 0.0" or greater for optimal isolation

